
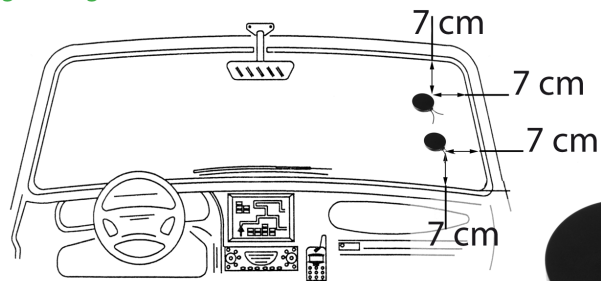



# Installation

ENAiK00N locate-06 with ENAiK00N driver-id and buzzer

## Straightforward installation:

- Just connect the ENAiK00N locate-06 to VCC and the DigIn 4 to Ignition,
  - attach the GSM/GPS antenna to the related connectors and mount the antenna,
  - pass the 1-Wire cable of ENAiK00N driver-id reader and affix it,
  - pass the black cable of the ENAiK00N buzzer to DigOut 2 and the red cable to VCC.
- That's all.

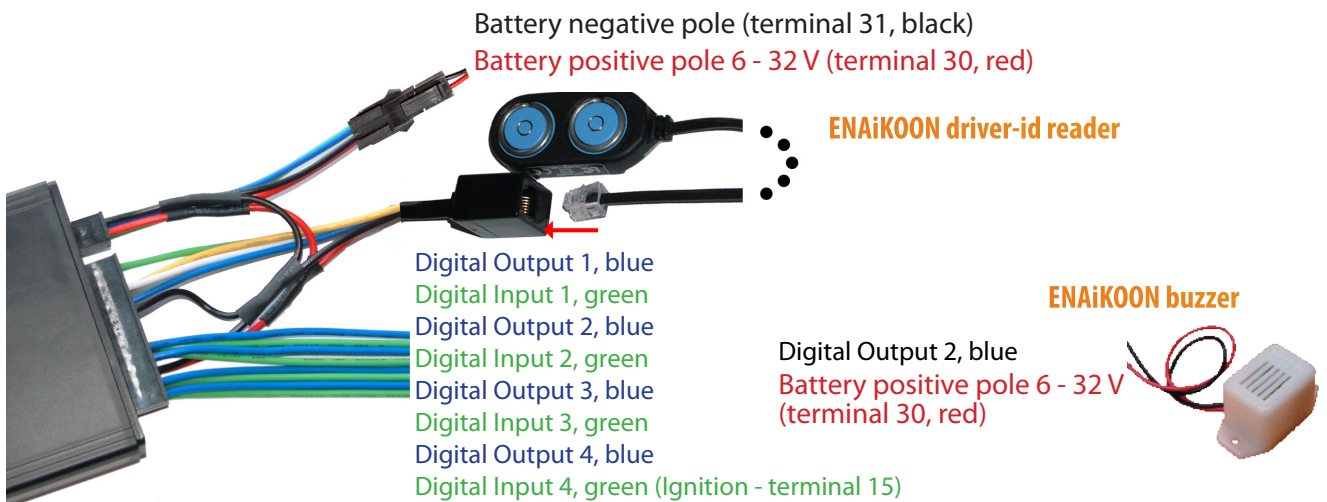

- Remove protective foil (white)
- Stick it to the windscreen from inside the vehicle
- Do not bend or fold up the antenna cable



**Please mount the antenna connectors hand tight only!**

Please ensure, that there is no material between the GSM/GPS windscreen antenna and the sky that might interfere with the radio transmission, especially metal, water, metallic evaporated windscreen or metallic varnished plastic parts.

Please ensure a minimum distance of 1 meter (1 yd) to other antennas mounted to the vehicle (radio antenna, toll collect antenna, car phone antenna etc.), as well as a minimum distance of 7 cm (2.8 in) to the frame of the front shield.

**ENAiK00N**  
distance under control

ENAiK00N GmbH  
Helmholtzstr. 2-9  
10587 Berlin  
Germany

Tel.: +49 (0)30 / 39747534  
Fax: +49 (0)30 / 39747543  
[service@enaikoon.com](mailto:service@enaikoon.com)

Service hotline: Mon. - Fri.,  
9:00 - 13:00 and 14:00 - 17:00 CET