


# Installation


ENAIK00N inmarsat-D

## Straightforward installation:

Just connect the ENAIK00N inmarsat-D to VCC and affix it with the included magnetic holders on the roof of your vehicle. That's all.

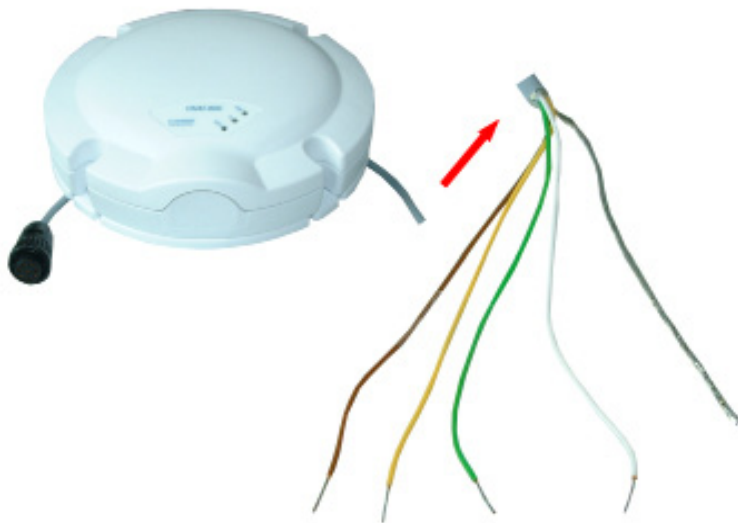

Please affix the insulation to Ground

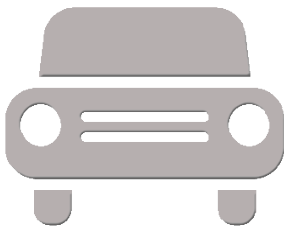

brown = Battery positive pole 9V - 32V (terminal 30)

yellow = RS-232 input

green = Battery negative pole (terminal 31)

white = RS-232 output



**Pls mount the antenna connectors hand tight only!**

Please ensure, that there is no material between the ENAIK00N inmarsat-D and the sky that might interfere with the radio transmission, especially metal, water, metallic evaporated windscreen or metallic varnished plastic parts.

Please ensure as well a minimum distance of 1 meter (1 yd) to other antennas mounted to the vehicle (radio antenna, toll collect antenna, car phone antenna etc.).

**ENAIK00N**  
distance under control

ENAIK00N GmbH  
Helmholtzstr. 2-9  
10587 Berlin  
Germany

Tel.: +49 (0)30 / 39747534  
Fax: +49 (0)30 / 39747543  
[service@enaikoon.com](mailto:service@enaikoon.com)

Service hotline: Mon. - Fri,  
9:00 - 13:00 and 14:00 - 17:00 CET