


Installation


ENAIK00N inmarsat-D

Straightforward installation:

Just connect the ENAIK00N inmarsat-D to VCC and affix it with the included magnetic holders on the roof of your vehicle. That's all.

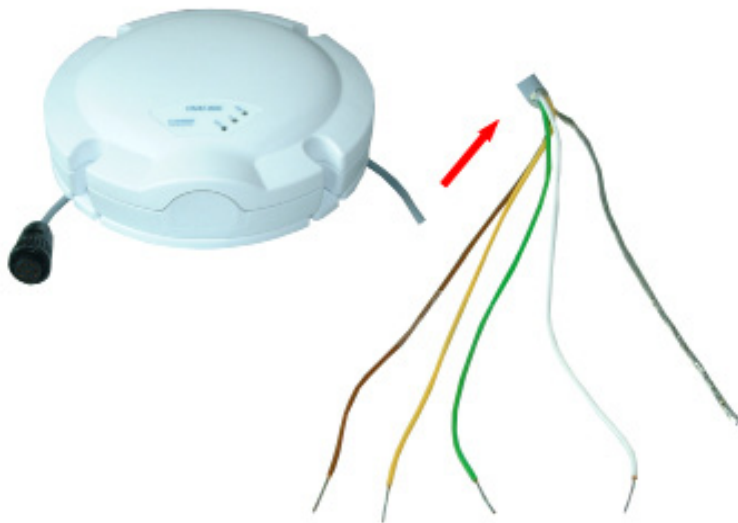

Please affix the insulation to Ground



brown = Battery positive pole 9V - 32V (terminal 30)

yellow = RS-232 input

green = Battery negative pole (terminal 31)

white = RS-232 output



Please mount the antenna connectors hand tight only!

Please ensure, that there is no material between the GSM/GPS windscreen antenna and the sky that might interfere with the radio transmission, especially metal, water, metallic evaporated windscreen or metallic varnished plastic parts.

Please ensure a minimum distance of 1 meter (1 yd) to other antennas mounted to the vehicle (radio antenna, toll collect antenna, car phone antenna etc.), as well as a minimum distance of 7 cm (2.8 in) to the frame of the front shield. There may be problems with the GPS receiver in vehicles with heated windscreens.

ENAIK00N
distance under control

ENAIK00N GmbH
Helmholtzstr. 2-9
10587 Berlin
Germany

Tel.: +49 (0)30 / 39747534

Fax: +49 (0)30 / 39747543

service@enaikoon.com

Service hotline: Mon. - Fri.,
9:00 - 13:00 and 14:00 - 17:00 CET